


NPB-GPRS Modem Option Datasheet

Overview


The NPM-GPRS modem option is part of the VYKON portfolio of hardware, software and tools designed for remote monitoring and control applications that enables end-to-end automation and device-to-enterprise integration.

The NPB-GPRS modem option card allows a JACE[®] controller to communicate via cellular communications where connectivity to a LAN, WAN, or VPN is either unavailable or not desired.

The connection is established via standard GPRS cellular modem using a local cellular service provider. Delivered with a small dual-band antenna, The NPB-GPR option card may be installed in any JACE[®]-2 or JACE[®]-6 platform running Niagara^{AX} 3.4 or higher. A service contract with an approved Cellular Service Provider is required and is must be purchased separately; refer to Ordering Information below..



Modem Option Card
with Antenna



Modem Option Card
with 2 meter extension
cable

Applications

The NPB-GPRS is intended for applications where a connection to the customer's WAN/LAN/VPN is not available. Utilizing cellular technology, the Niagara enabled JACE can be connected to the end-user's network with one of two (2) Virtual Private Network (VPN) techniques. See the "Connectivity Options" below for details. This connection method provides the option to offer connectivity to customers who in the past, have not had a method for a single stand-alone JACE to communicate with the Internet or a customer's in-house WAN/LAN/VPN.

Features

- Provides remote access to JACE where ISP connectivity is not otherwise available.
- Provides GPRS cellular network communication connectivity.
- Fits into either expansion slot of a standard JACE-2 or JACE-6.
- Includes an antenna mounted directly to the option card, or an optional 2 meter (6 foot) extension cable to re-locate the antenna away from the JACE.
- Standard plug-in Subscriber Identity Module (SIM) slot for cellular service provider specific connection information.

Connectivity Options

There are two (2) methods of connecting to the remote JACE using the GPRS cellular option. The Point-to-Point Tunneling Protocol (PPTP) over the Internet is best suited for a one-to-one connection between the JACE and a single user. This method is utilized for temporary access to the cellular device for either connection to use the tools, or to utilize a Browser to monitor the JACE. The most robust form of connectivity utilizes IP Security Protocol (IPSec). IPSec connects two firewalls or routers via a secure tunnel and is more reliable than a PPTP connection. This method has much higher bandwidth and will recover quickly from communication breaks in the connection. In addition, IPSec can be utilized to connect an entire user's LAN to the Wireless Network where the cellular GPRS connected devices exist.

Specifications

- Quad-Band GSM (850/900/1800/1900 MHz)
- Utilizes an industry standard Siemens TC63 cellular communications module.
- Typical Connection Speeds
 - ♦ Download Speed: 30-60K Bps
 - ♦ Upload Speed: 10-15K Bps
- GPRS Multi-Slot Class 12
- GSM Release 99
- Output Power
 - ♦ Class 4 (2W) for EGSM850
 - ♦ Class 4 (2W) for EGSM900
 - ♦ Class 1 (1W) for GSM1800
 - ♦ Class 1 (1W) for GSM1900
- Internet Services: TCP, UDP, HTTP, FTP, SMTP, and POP3
- Specifications for GPRS data Transmission:
 - ♦ GPRS class 12: max. 86K Bps (DL & UL)
 - ♦ Mobile station class B
 - ♦ PBCCH support
 - ♦ Coding schemes CS 1-4
- Approvals: R&TTE, FCC, UL, IC, GCF, PTCRB, CE,
- Cellular Service Provider: Wyless Group (www.wyless.com)

Ordering Information

NPB-GPRS-W

Modem option card including the standard antenna which mounts directly to the side of the option card and a SIM for use with Wyless cellular as the service provider. Wyless is the only Tridium approved service provider for the continental US.

GPRS-CBL-EXT

Optional two (2) meter extension cable with mounting bracket to extend the antenna connection to a more remote location. Typically utilized to relocate the antenna outside of a metal enclosure.

GPRS-SIM-W

Replacement SIM for using the modem with Wyless as the service provider.


NPB-GPRS

Modem option card including the standard antenna which mounts directly to the side of the option card. No SIM provided with this option. For use when service provider other than Wyless is required. Cellular service provider must be negotiated by the installer.

US Cellular Service Provider

Wyless Group (www.wyless.com). Order cellular service on-line separately.

Architecture

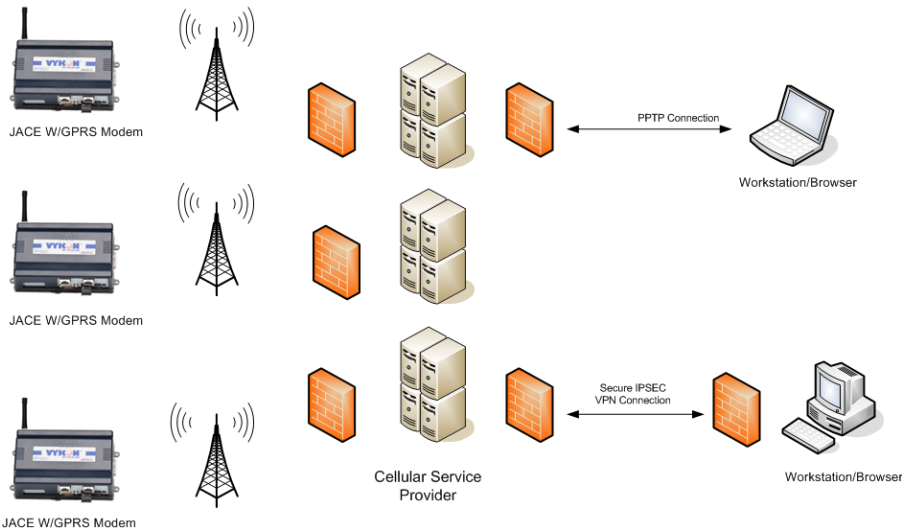

www.tridium.com

The Americas

3951 Westerre Parkway, Suite 350
 Richmond, VA 23233 USA
 1.804.747.4771 Phone
 1.804.747.5204 Fax

Europe, Middle East & Africa

1 The Grainstore, Brooks Green Road
 Coolham, West Sussex RH13 8 GR UK
 +44 (0) 1403.740290 Phone
 +44 (0) 1403.741804 Fax

Asia Pacific

101 Cecil Street, #10-11
 Tong Eng Building, Singapore 069533
 +65.6.887.5154 Phone
 +65.6.887.5342 Fax